
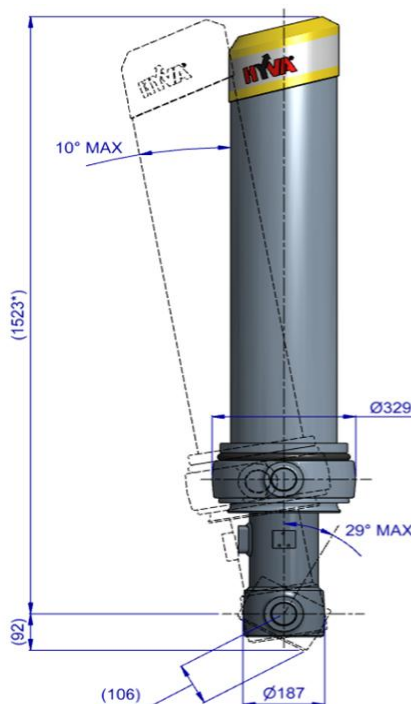


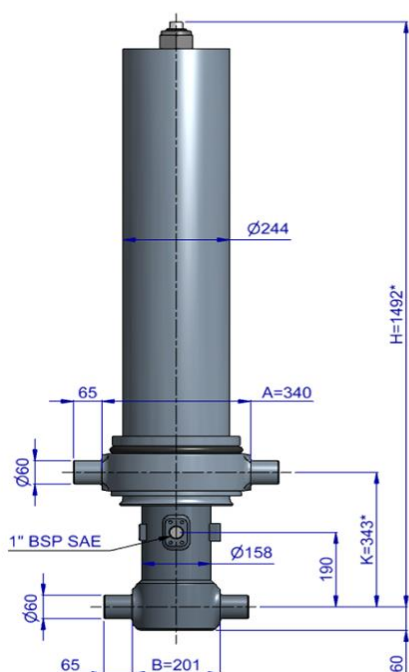

* incl. 20 [-5; +30] mm pull out

3D model is available on request or www.hyva.com

Specifications		Max. pump flow		Tipping time	
Max. working pressure	250 bar	With KO ¹	151 L/min	With KO ¹	17 sec
Weight	232 kg	Without KO ¹	106 L/min	Without KO ¹	24 sec
Working volume	43 L	With KO ¹ below -20°C	106 L/min	With KO ¹ below -20°C	24 sec
Total volume	48 L	Without KO ¹ below -20°C	74 L/min	Without KO ¹ below -20°C	34 sec
Max. cyl. load (start tipping)	220 kN			Allowable lowering time	14 sec
Max. cyl. load (end of stroke) ²	171 kN				
Max. cyl. load (end of stroke) ³	199 kN				

Technical notes

• This cylinder is a lifting device only. • It should not be used as a structural member and should not be subjected to side loads. • Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure. • Verify max. cyl. load. • Working temperature range is between -40°C and +80°C. • Max. duration of extension is 0.5 hours (excluded hard chromed stages). • Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227. • ¹ Hyva knock-off. • ² Unsubstantial unloading (sticky load). • ³ Substantial unloading.

Related documentation


Bracket options:	015BRA10 & 015BRA12
Mounting instructions:	CYL-0030
Oil specifications:	OIL-0011
Spec sheet explanation:	CYL-0041

Configuration

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	137	118	99	80				4525
Stroke* [mm]	110	135	140	140				

Tipping weight

For detailed tipping calculations please refer to: <https://tipper.hyva.com>




BL	body length
OH	rear overhang
Ycog	vert. pos. centre of gravity
Qo	pivot length
C	bracket length
At	tipping angle
	$stroke \times 60 / Qo$



BL [mm]		6000			5750			5500	
OH [mm]	200	500	800	200	500	800	200	500	800
At [°]	44	47	50	46	49	52	49	52	55
Ycog [mm]									
600	36	40	46	37	42	49	39	45	54
900	39	45	53	41	48		43	51	
1200	43	50		46					

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 229 mm

Pos.	Part no.	Description	Qty.
C01	71839040	DUST COVER FC LOW 15-244	1
C02	71736424	COVER 242-1165 PIN60 A340 SPH LOCK	1
C03	01702956K	WASHER M48 DIN 125B ZP	1
C04	01702907K	TOPNUT NYLOC M48x3 DIN 985 ZP	1
C05	01791941	O-RING COVER D.242	1
C06	15014550K	BOLT HSHC M12X30X1.75 Q8.8 DIN 912 ZP	1
P01	70442371	PISTON MN3 S 080-1365-HD-HC	1
P02	70207080K	SLIDER MN 080 (2 x 1/2) A35	1
P03	70216080K	OUTER STOPRING MN 080 A22	2
P04	70230080	BOTTOM PLATE PISTON MN 080 MK2 HD	1
P05	01745030K	CIRCLIP 67 DIN 472 (71.5x2.5)	1
P06	70260210K	O-RING PISTON BOTTOM 080	1
P07	70232305	PISTON HEAD MN3 080	1
P08	70260110K	O-RING 63.09 X 3.53 MM	1

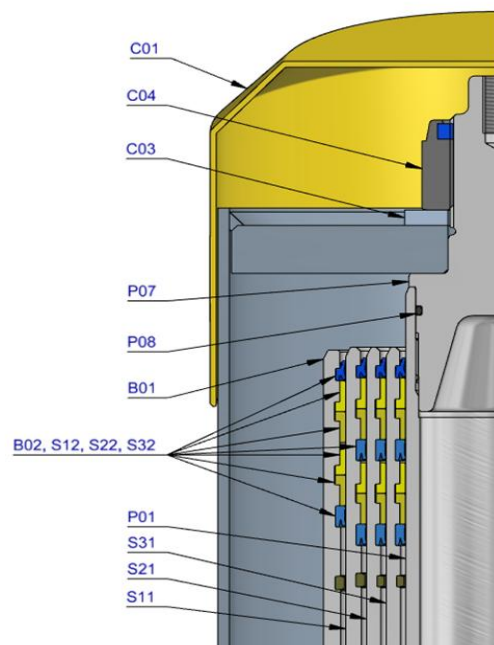

S31	70673370	STAGE MN2 099-1360-HD	1
S32	70202099K	PACKSET MN 099 TANDEM SEAL	1
S33	70207099K	SLIDER MN 099 (2 x 1/2) A35	1
S34	70216099K	OUTER STOPRING MN 099 A22	2
S35	70217099K	LIFTRING MN 099 A22	1
S21	70674370	STAGE MN2 118-1360-HD	1
S22	70202118K	PACKSET MN 118 TANDEM SEAL	1
S23	70207118K	SLIDER MN 118 (2 x 1/2) A35	1
S24	70216118K	OUTER STOPRING MN 118 A22	2
S25	70217118K	LIFTRING MN 118 A22	1
S11	70675370	STAGE MN2 137-1360-HD	1
S12	70202137K	PACKSET MN 137 TANDEM SEAL	1
S13	70207137K	SLIDER MN 137 A35	1
S14	70216137K	OUTER STOPRING MN 137 A22	1
S15	70217137K	LIFTRING MN 137 A22	1
B01	70376370R1065	BASE MN2 157-1399-4/4BSAE-190-C242-HD	1
B02	70203157K	PACKSET MN 157	1
B03	70225355	BOTTOM PLATE MN2 157	1
B04	70270157K	SEAL BOTTOM PLATE MN 157	1
B05	70220157	LOCKING PLATE MN 157	3
B06	01732055K	BOLT HEX M8X20X1.25 SET 6 PCS	1
B07	01732559K	WASHER SPRING M8 SET 6 PCS	1

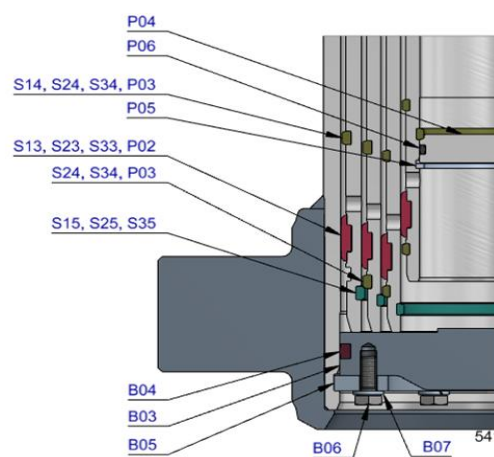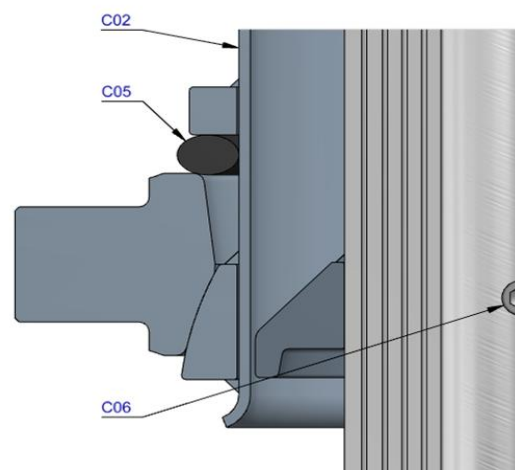

Seal kit complete

71907541K	Consists of all packsets with packset grease and O-rings
-----------	--

Notes

The inner stopring and piston bottom are pre-mounted on spare bases, stage and pistons. Therefore, when ordering new tubes, it is not required to order these parts separately.

For repair instructions see: CYL-0040. Serial no. is located on type plate and near type plate support.