
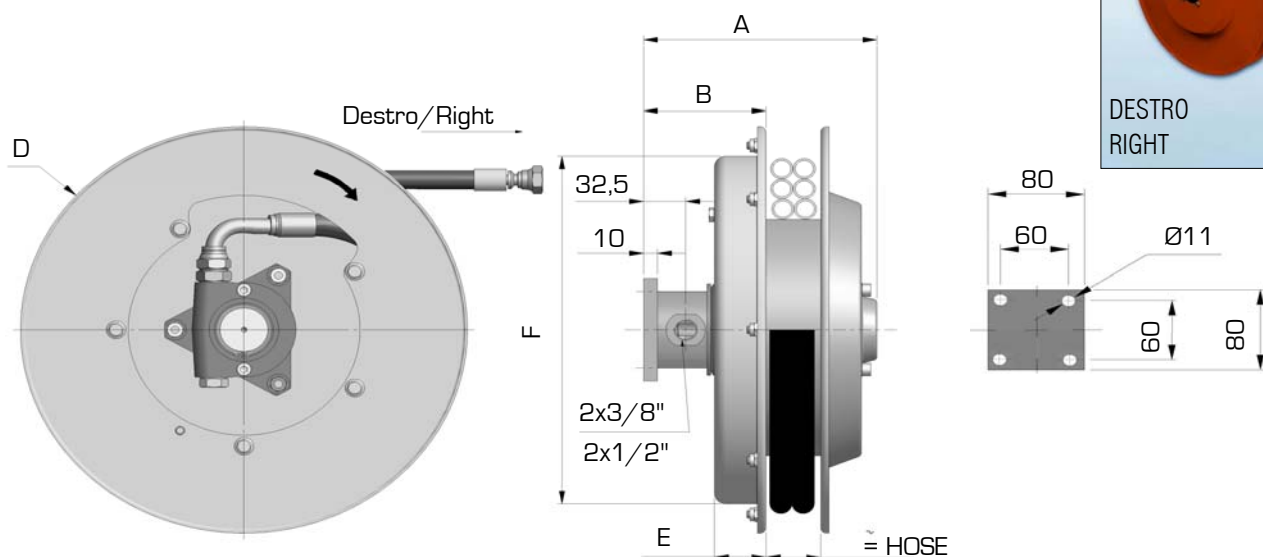


141.1
MAX
40 l/min

W. P. 300 bar
Option 400 bar

DESTRO
RIGHT


AGD 400 = MODELLO DESTRO / RIGHT MODEL
AGS 400 = MODELLO SINISTRO / LEFT MODEL
Es. ORD: AGD 400.10.R7/F

Modello destro Right model	A	B	D	E	F	Con tubo/With hose		
	mm					Ø	Lungh. totale Total length m	Lungh. utile Usable length m
AGD520.06.XX/F	176	97	520	47	322	1/4"	14,5	14,0
AGD520.08.XX/F						5/16"	12,5	12,0
AGD520.10.XX/F						3/8"	11,2	10,7
AGD520.12.XX/F						1/2"	9,0	8,5
AGD570.06.XX/F	176	97	570	47	322	1/4"	17,5	17,0
AGD570.08.XX/F					422	5/16"	15,5	15,0
AGD570.10.XX/F						3/8"	13,5	13,0
AGD570.12.XX/F						1/2"	10,7	10,2
AGD600.06.XX/F	176	97	620	47	422	1/4"	21,0	20,5
AGD600.08.XX/F						5/16"	17,0	16,5
AGD600.10.XX/F						3/8"	16,0	15,5
AGD600.12.XX/F						1/2"	12,5	12,0
AGD650.06.XX/F	176	97	650	47	422	1/4"	22,5	22,0
AGD650.08.XX/F						5/16"	19,5	19,0
AGD650.10.XX/F						3/8"	17,5	17,0
AGD650.12.XX/F						1/2"	14,5	14,0
AGD700.06.XX/F	176	97	720	47	532	1/4"	27,0	26,5
AGD700.08.XX/F						5/16"	22,0	21,5
AGD700.10.XX/F						3/8"	20,0	19,5
AGD700.12.XX/F						1/2"	16,0	15,5
AGD800.08.XX/F	186	107	820	57	532	5/16"	30,0	29,0
AGD800.10.XX/F						3/8"	26,0	25,0
AGD800.12.XX/F						1/2"	21,0	20,0