


This Coils series include connection DIN 43650 – KOSTAL M 24x4 – AMP JUNIOR – DEUTSCH
Protection Class (with connector assembled) IP 65 DIN 40050 Encapsulation with nylon 6 and fiberglass
Insulation Coil Class F – VDE 0580 Insulation Copper wire Class H – VDE 0580

Coils **B28** Series (DIN 43650)

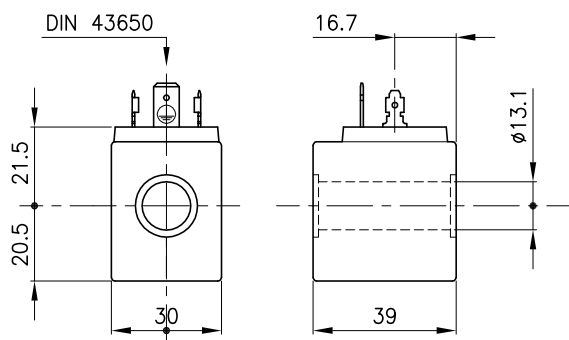


Power 18 Watt

Voltage range $\pm 10\%$ Duty cycle ED 100%

* (1) Nominal current * (2) Resistance 20°C $\pm 5\%$

Type	Code	Volt	Ampere	Ohm
B28-12C-18H	25 125 112	12	1.50	8
B28-24C-18H	25 125 113	24	0.75	32
B28-24A-18H	25 125 114	19.4	0.93	20.9
B28-110A-18H	25 125 115	96	0.19	512
B28-220A-18H	25 125 116	194	0.09	2090

Coils **B28** Series (KOSTAL)

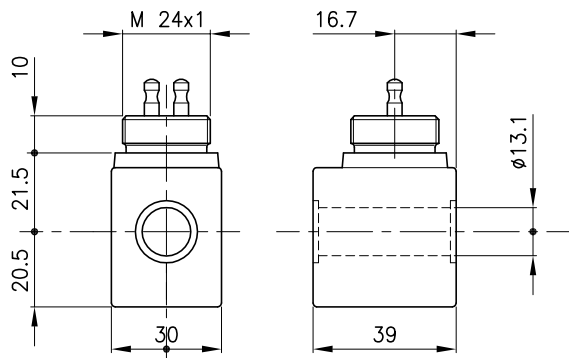

Power 18 Watt

Voltage range $\pm 10\%$


Duty cycle ED 100%

* (1) Nominal current

* (2) Resistance 20°C $\pm 5\%$

Type	Code	Volt	Ampere	Ohm
B28-12C-18K	25 125 118	12	1.50	8
B28-24C-18K	25 125 119	24	0.75	32

Coils **B28** Series (AMP JUNIOR)

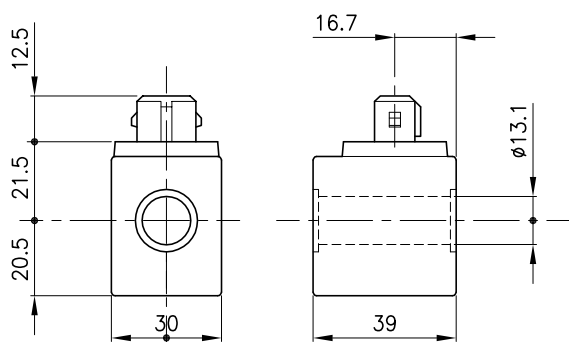

Power 18 Watt

Voltage range $\pm 10\%$


Duty cycle ED 100%

* (1) Nominal current

* (2) Resistance 20°C $\pm 5\%$

Type	Code	Volt	Ampere	Ohm
B28-12C-18J	25 125 124	12	1.50	8
B28-24C-18J	25 125 125	24	0.75	32

Coils **B28** Series (DEUTSCH)

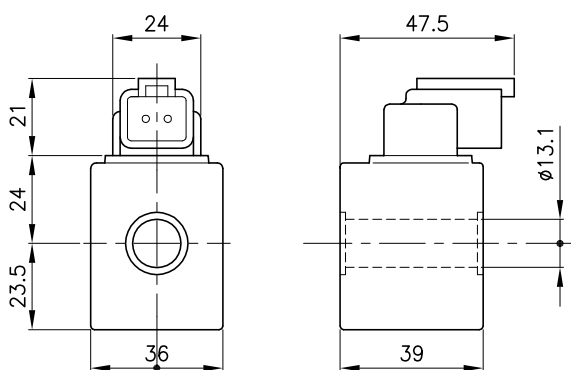

Power 22 Watt

Voltage range $\pm 10\%$

Duty cycle ED 100%

* (1) Nominal current

* (2) Resistance 20°C $\pm 5\%$

Type	Code	Volt	Ampere	Ohm
B28-12C-22D	25 125 135	12	1.83	6.5
B28-24C-22D	25 125 136	24	0.92	26.1