

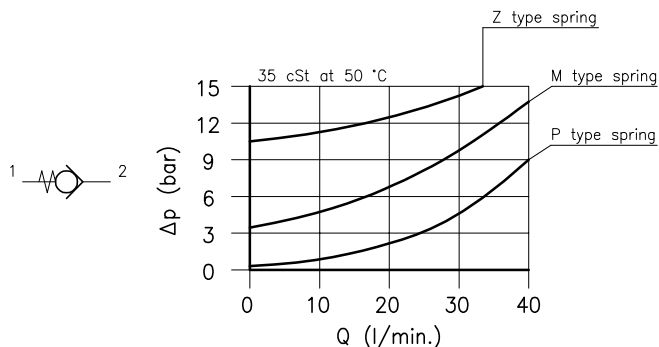


Technical features



Cavity	(For dimensions see catalogue 17.000)	S 20/2
Nominal flow	(l/min.)	35
Max. pressure	(bar)	420
Cracking pressure	(bar)	0.35–3.5–11
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.055
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions



Ordering informations

CAE 20/P

CAE 20 = Valve type



Standard springs

P = 0.35 bar

M = 3.5 bar

Z = 11 bar

Codes:

CAE 20/P 22 011 106

CAE 20/M 22 011 107

CAE 20/Z 22 011 164

External seals kit 90 620 100

CAE 20 valves can be assembled
on standard bodies 20-LO series;
for dimensions see catalogue 16.010