

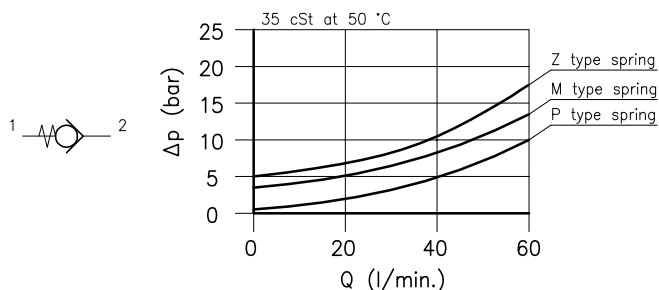


Technical features



Cavity	(For dimensions see catalogue 17.000)	S 30/2
Nominal flow	(l/min.)	60
Max. pressure	(bar)	420
Cracking pressure	(bar)	0.35–3.5–5
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.100
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions



Ordering informations

CAE 30/P

CAE 30 = Valve type



Standard springs

P = 0.35 bar

M = 3.5 bar

Z = 5 bar

Codes:

CAE 30/P 32 011 102

CAE 30/M 32 011 103

CAE 30/Z 32 011 158

External seals kit 90 620 103

CAE 30 valves can be assembled on standard bodies 30-LO series; for dimensions see catalogue 16.010