



**Technical features**

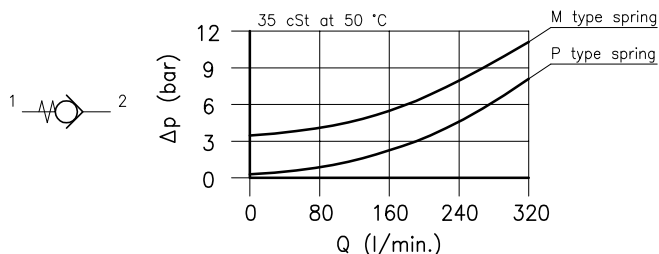

|                                                         |                                       |           |
|---------------------------------------------------------|---------------------------------------|-----------|
| Cavity                                                  | (For dimensions see catalogue 17.000) | S 70/2    |
| Nominal flow                                            | (l/min.)                              | 300       |
| Max. pressure                                           | (bar)                                 | 420       |
| Cracking pressure                                       | (bar)                                 | 0.35–3.5  |
| Fluid viscosity range                                   | (cSt)                                 | 2.8 – 380 |
| Fluid temperature range                                 | (°C)                                  | –20 +80   |
| Mass                                                    | (kg)                                  | 0.480     |
| Hydraulic fluid; mineral oil HM and HV ISO 6074         |                                       |           |
| Recommended filtration; 19/15 ISO 4466 (25 μ absolutes) |                                       |           |
| Standard seals in Polyurethane and Buna N               |                                       |           |


**Dimensions**

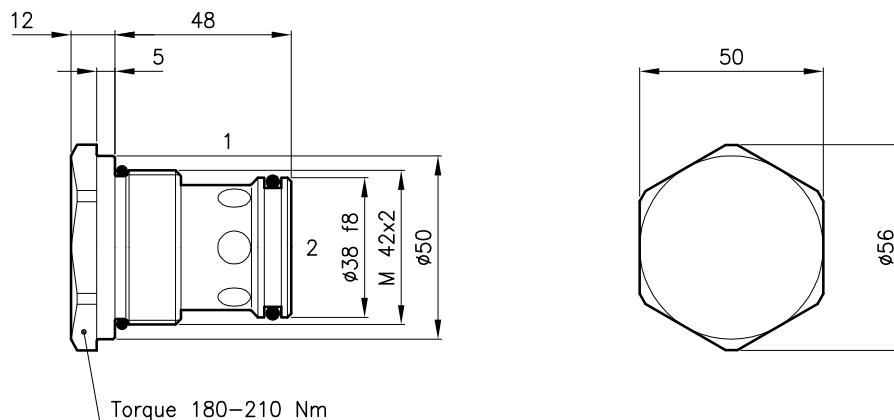

**Ordering informations**

**CAE 70/P**

**CAE 70** = Valve type



Standard springs

**P** = 0.35 bar

**M** = 3.5 bar

Codes:

CAE 70/P 72 011 100

CAE 70/M 72 011 101

External seals kit 90 620 109

CAE 70 valves can be assembled on standard bodies 70–LO series; for dimensions see catalogue 16.010