



Technical features

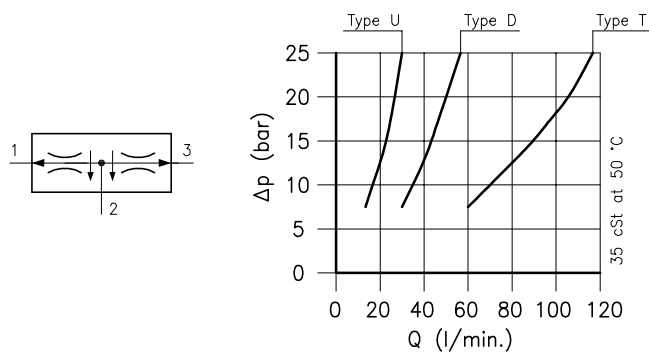

Cavity	(For dimensions see catalogue 17.000)	S 50/4
	type U	15 – 30
Inlet flow range (l/min.)	type D	30 – 60
	type T	60 – 120
Max. pressure	(bar)	210
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.510
Max. accuracy from 10 to 210 bar		5%
Standard flow division	(%)	50/50
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

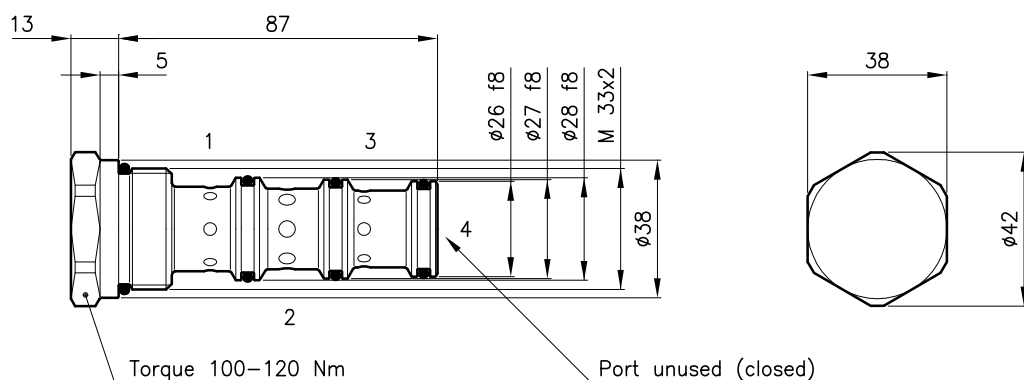

Ordering informations

DCC 50/D

DCC 50 = Valve type



Inlet flow range

U = 15 – 30 l/min

D = 30 – 60 l/min

T = 60 – 120 l/min

Codes:

DCC 50/U 53 011 108

DCC 50/D 53 011 109

DCC 50/T 53 011 110

External seals kit 90 620 108

DCC 50 valves can be assembled on standard bodies 50-CC series; for dimensions see catalogue 16.011