




Technical features

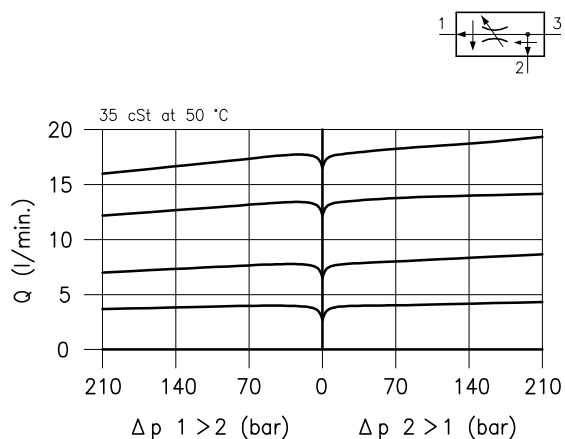

Cavity	(For dimensions see catalogue 17.000)	S 20/3
Max. inlet flow	(l/min.)	30
Flow setting range ± 10% (l/min.)	type U	0.6 – 2.2
	type D	1.5 – 4.5
	type T	3.2 – 9.5
	type Q	6 – 18
Max. pressure	(bar)	315
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass (Standard adjustment type N)	(kg)	0.160
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

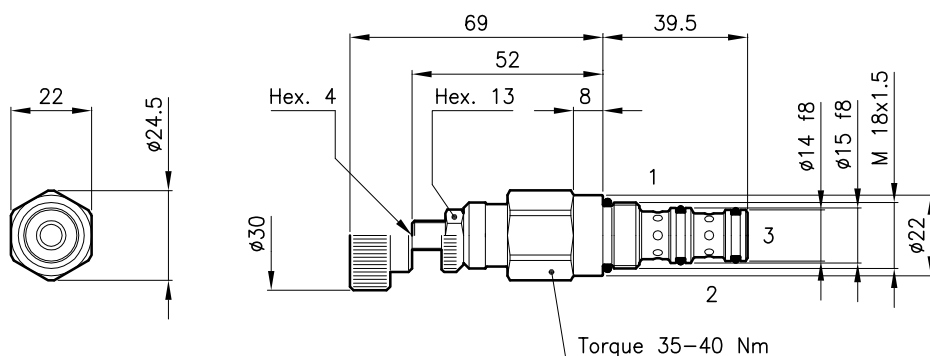

Ordering informations

DPC 20/D-N

RDC 20 = Valve type



Flow setting range

U = 0.6 – 2.2 l/min

D = 1.5 – 4.5 l/min

T = 3.2 – 9.5 l/min

Q = 6 – 18 l/min

Adjustment type

N = Standard adjustment

V = Handknob adjustment



Codes:

DPC 20/U-N	23 011 104
DPC 20/D-N	23 011 105
DPC 20/T-N	23 011 106
DPC 20/Q-N	23 011 107

DPC 20/U-V	23 011 115
DPC 20/D-V	23 011 116
DPC 20/T-V	23 011 117
DPC 20/Q-V	23 011 118

External seals kit 90 620 101

DPC 20 valves can be assembled on standard bodies 20-C3 series; for dimensions see catalogue 16.010