




Technical features

02


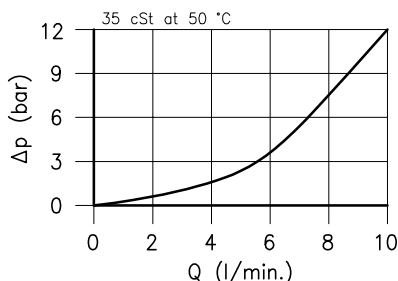


02-MO



Cavity	(For dimensions see catalogue 17.001)	S 29/2
Max. flow	(l/min.)	10
Max. pressure	(bar)	210
Response time	(ms)	20 - 40
It change in function of circuit, pressure, flow and fluid viscosity.		(Mean value)
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.120
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

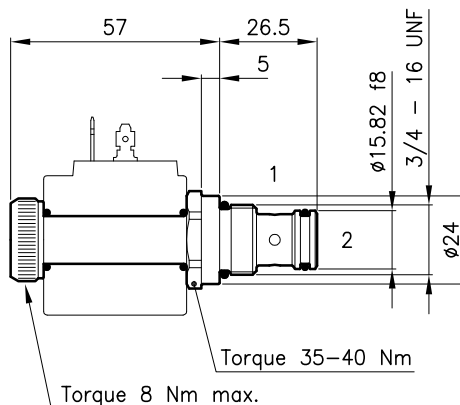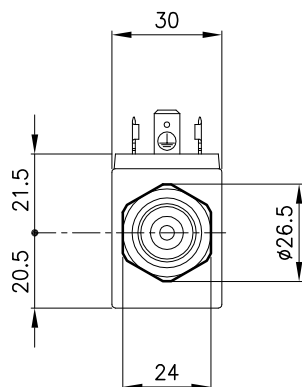

Ordering informations


ECD 29/2202-MO

ECD 29/22.. = Valve type



Circuits

2202 =



MO = Manual override
(Omit if not request)

Codes:

ECD 29/2202	25 011 132
ECD 29/2202-MO	25 011 166
External seals kit	90 620 113

ECD 29/22.. valves can be assembled on standard bodies 29-L0 series; for dimensions see catalogue 16.020

On the ECD 29 valves must be assembled the Coils B28 series; for dimensions, features and codes see catalogue 09.902.