



Technical features

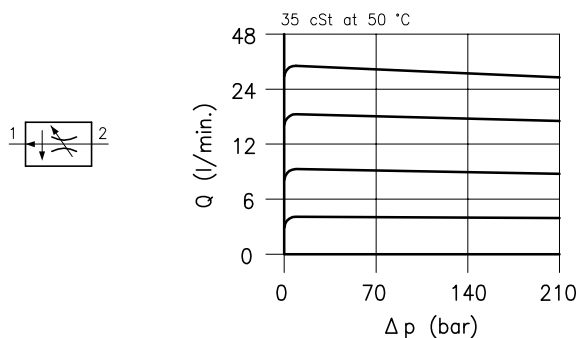

Cavity	(For dimensions see catalogue 17.000)	S 30/2
	type U	3 – 6
Flow setting range	type D	6 – 11
± 10% (l/min.)	type T	13 – 25
	type Q	25 – 45
Max. pressure	(bar)	315
Flow viscosity range	(cSt)	2.8 – 380
Flow temperature range	(°C)	–20 +80
Mass	(Standard adjustment type N) (kg)	0.260
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

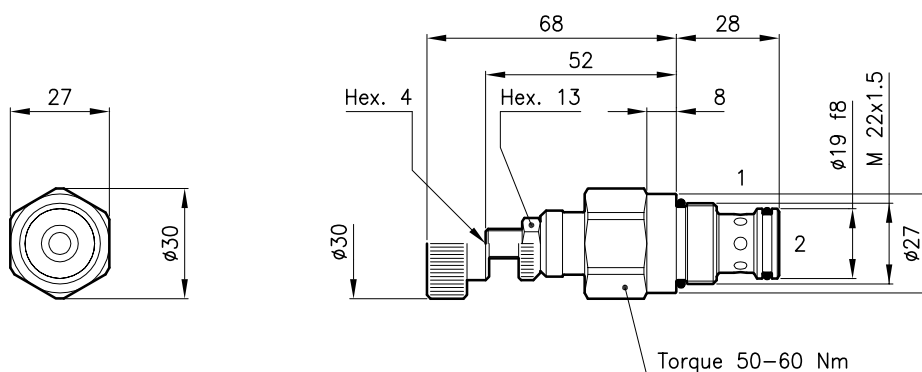

Ordering informations

RDC 30/D–N

RDC 30 = Valve type



Flow setting range

U = 3 – 6 l/min
D = 6 – 11 l/min
T = 13 – 25 l/min
Q = 25 – 45 l/min

Adjustment type

N = Standard adjustment
V = Handknob adjustment



Codes:

RDC 30/U–N	33 011 119
RDC 30/D–N	33 011 120
RDC 30/T–N	33 011 121
RDC 30/Q–N	33 011 122
RDC 30/U–V	33 011 123
RDC 30/D–V	33 011 124
RDC 30/T–V	33 011 125
RDC 30/Q–V	33 011 126
External seals kit	90 620 103

RDC 30 valves can be assembled on standard bodies 30–LO series; for dimensions see catalogue 16.010