



Technical features

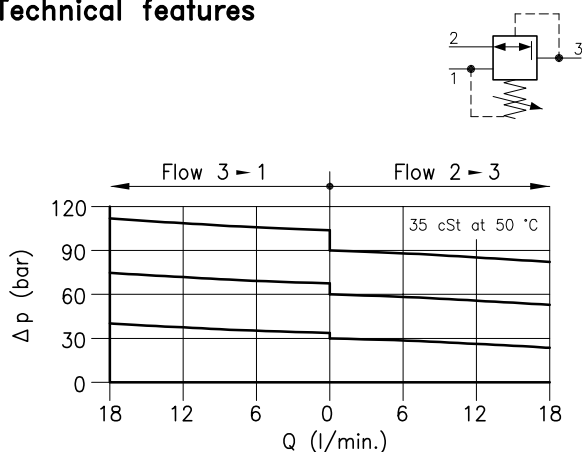

Cavity	(For dimensions see catalogue 17.000)	S 20/3
Max. flow	(l/min.)	16
Max. inlet pressure	(bar)	420
Pressure setting range	(bar)	5 – 90
Max. drain	(l/min.)	0.1
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.160
Standard setting obtained with 1 l/min.		
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

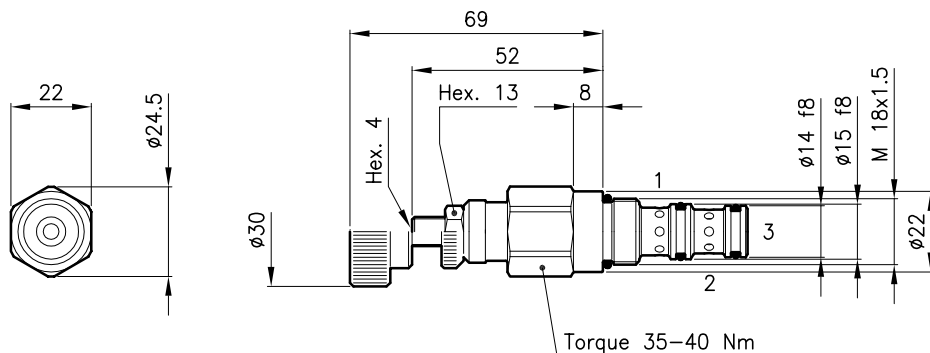

Ordering informations

RLD 20/D-N

RLD 20 = Valve type



Standard springs

Type	Setting range	Factory set
U	5 – 30 bar	20 bar
D	14 – 60 bar	40 bar
T	35 – 90 bar	70 bar

Adjustment type

N = Standard adjustment

V = Handknob adjustment



Codes:

RLD 20/U-N	21 011 148
RLD 20/D-N	21 011 149
RLD 20/T-N	21 011 150
RLD 20/U-V	21 011 151
RLD 20/D-V	21 011 152
RLD 20/T-V	21 011 153

External seals kit 90 620 101

RLD 20 valves can be assembled on standard bodies 20-C3 series; for dimensions see catalogue 16.010