




Technical features

05




11



Cavity	(For dimensions see catalogue 17.000)	S 20/4
Nominal flow	(l/min.)	15
Max. pressure	(bar)	350
Pilot pressure	(bar)	3 – 5
Pilot volume	(cm ³)	0.12
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.100
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

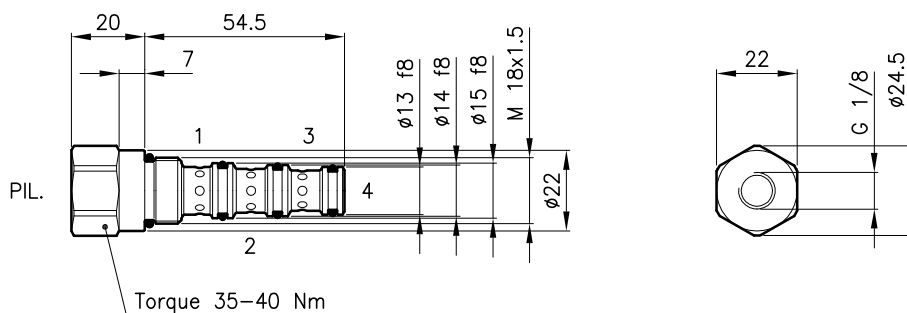

Ordering informations

VDT 20/4211

VDT 20 = Valve type



Circuits

4205 =

4211 =

Codes:

VDT 20/4205 22 011 134

VDT 20/4211 22 011 135

External seals kit 90 620 102

VDT 20 valves can be assembled on standard bodies 20–C4 series; for dimensions see catalogue 16.011