

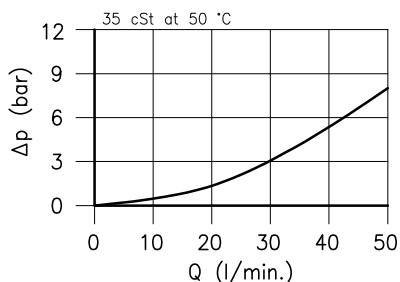


Technical features



Cavity	(For dimensions see catalogue 17.000)	S 30/3
Nominal flow	(l/min.)	40
Max. pressure	(bar)	350
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.280
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

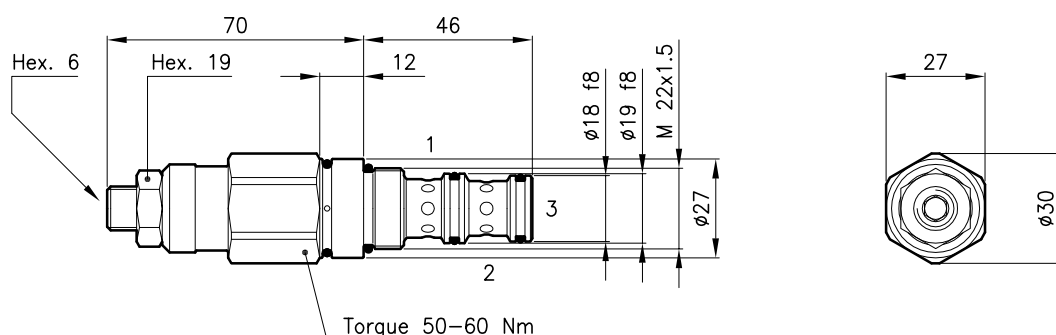

Ordering informations

VDT 30/3201-D-N

VDT 30 = Valve type



Circuits

3201 =

3202 =

Standard springs

Type Setting range

U = 5 – 35 bar

D = 14 – 70 bar

T = 35 – 105 bar

Q = 70 – 210 bar

Adjustment type

N = Standard adjustment



Codes:

VDT 30/3201-U-N 32 011 106
VDT 30/3201-D-N 32 011 107
VDT 30/3201-T-N 32 011 108
VDT 30/3201-Q-N 32 011 186

VDT 30/3202-U-N 32 011 109
VDT 30/3202-D-N 32 011 110
VDT 30/3202-T-N 32 011 111
VDT 30/3202-Q-N 32 011 187

External seals kit 90 620 104

VDT 30 valves can be assembled on standard bodies 30-C3 series; for dimensions see catalogue 16.010