




Technical features

05




11



Cavity	(For dimensions see catalogue 17.000)	S 30/4
Nominal flow	(l/min.)	30
Max. pressure	(bar)	350
Pilot pressure	(bar)	3 – 5
Pilot volume	(cm ³)	0.3
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.180
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

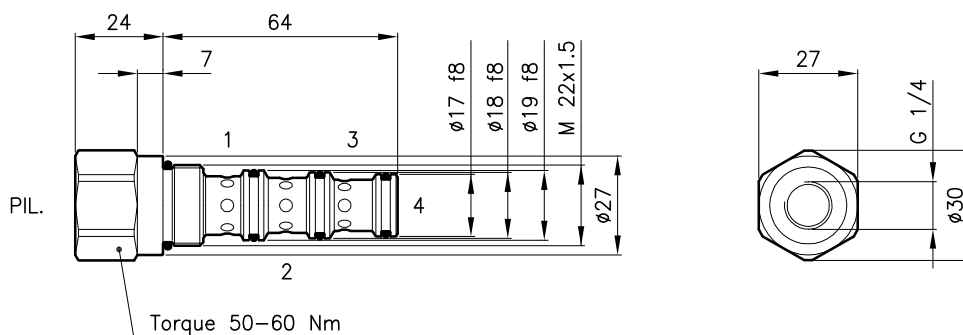



Ordering informations

VDT 30/4211

VDT 30 = Valve type



Circuits



Codes:

VDT 30/4205	32 011 118
VDT 30/4211	32 011 119
External seals kit	90 620 105

VDT 30 valves can be assembled on standard bodies 30–C4 series; for dimensions see catalogue 16.011