
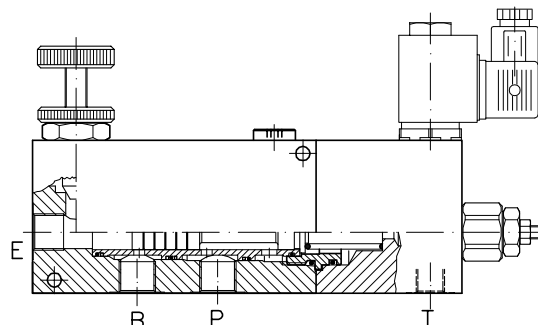



VRF-3V+VMP+VMS-...

REGOLATORE DI FLUSSO PRIORITARIO CON BY-PASS PILOTATO
(MARTELLIO IDRAULICO)

PRIORITY FLOW CONTROL, HAMMER VERSION



CARATTERISTICHE

Luce nominale

Portata max in entrata

Pressione di lavoro max.

Temperatura ambiente

Temperatura olio

Filtraggio consigliato

Peso

150 l/min - 40 GPM

350 bar - 5075 PSI

-30°C + 50°C

-30°C + 80°C

50 micron

6.560 Kg. 3/4" GAS

PERFORMANCE

Rated size

Inlet flow rate

Max working pressure


Room temperature

Oil temperature

Recommended filtration


Weight

Viscosita' olio 46 cSt a 50°C — Oil viscosity 46 cSt at 50°C

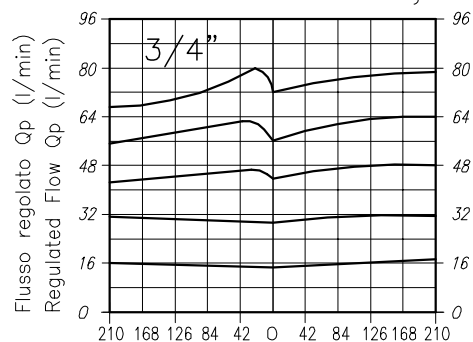

press. in B > che in P / press. in B < che in P (bar)
B load > P load / B load < P load (bar)

Viscosità olio 46 cSt a 50°C
Oil viscosity 46 cSt at 50°C

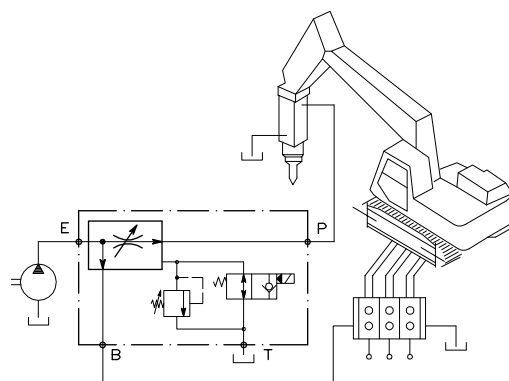

Campo taratura Setting range		Attacchi Port size E-P-B GAS (BSPF)	QP l/min - GPM	QE l/min - GPM
198	199	3/4"	90-23.8	150-39.6

QP = Portata max in uscita prioritario "P" - l/min
QP = Max delivery in priority "P" - l/min

004		198		0		X		0	
Campo taratura / Setting range									
198		199							
Campo taratura 20÷350 bar		Campo taratura 10÷210 bar							
Setting range 20÷350 bar		Setting range 10÷210 bar							

40